Ø25



Volume 20-50 ml (0.67- 1.7 fl.oz)
Length 75-145 mm
Wall thickness 460 ± 30 µm



Stand Up

Ø30



Volume 25-95 (0.85-3.21 fl.oz)
Length 75-175 mm
Wall thickness 470 ± 20 µm



Stand Up

Ø35



Volume 45-140 ml (1.52- 4.73 fl.oz)
Length 80-185 mm
Wall thickness 470 ± 20 µm



Screw on Fliptop



Stand Up



Oriented Fliptop

Ø40



Volume 50-175 ml (1.7- 5.91 fl.oz)
Length 85-185 mm
Wall thickness 470 ± 20 µm



High Stand Up



Oriented Fliptop

Ø50



Volume 100-275 ml (3.38- 9.29 fl.oz)
Length 100-195 mm
Wall thickness 480 ± 30 µm



Oriented Fliptop

Shrink wrap (Plastic Sleeve) - Israel only

Foil seal on tube orifice (screw cap only)

Available in LAGEEN TUBES EU


* All pictures shown are for illustration purpose only. Actual product may vary due to product enhancement.

Recommended Tube Length in mm

Tube Diameter in mm	25	30	35	40	50
Min. Length (mm)	75	75	80	85	100
Volume(ml)					
15					
20	80				
25	90	75			
30	100	85			
35	110	90			
40	120	95			
50	140	110	90	85	
60		125	105	95	
70		140	115	105	
80			125	110	
90			135	120	
100			145	125	105
120			165	145	110
125			170	150	115
150				165	130
175					145
200					155
250					180
Max. Length (mm)	145	175	185	185	190-195 *upon approval
Approximate Tube Diameter in Inches	1”	1 1/5”	1 3/8”	1 ½”	2”




Mono Layer Tubes
Available as one material or a combination of HDPE, LDPE or LLPE



Two Layer Tubes
Available with several polyethylene combinations of outer and inner layers types

CoExtruded (CoEx) Plastic Tube composition

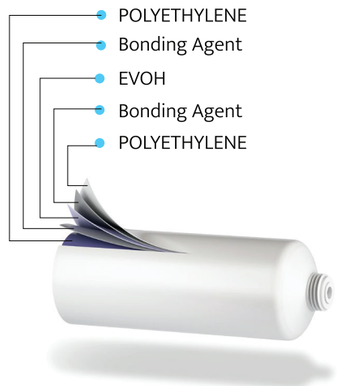

Multi Layer Tubes
five-layer tube, mainly used for products sensitive to oxidation